



120HWT.13PT

13up Plant Wraps

KERNOW PRINT®
DRY TONER

- Pre-perforated, simple tab construction, ready to print
- Matt white opaque suitable for full colour printing
- Waterproof, tear-proof, greaseproof
- No need to laminate

Please Note: Keep all print a minimum of 4mm away from the scored area

Compatibility Guidance:

Suitable for most thermal transfer and dry toner (laser/LED/flash fusion) print processes, both mono and colour small-volume, mid-volume & production machines.


On such machines the user must establish for themselves the optimum settings and paper path, being aware of the thickness and weight of the material.

Recommended Conditions:

Printroom	10°C - 30°C	40% - 55% RH
Usage	-40°C - 120°C	10% - 100% RH
Storage	10°C - 20°C	20% - 55% RH

Available in A4

Thickness (120µ/4.7mil) Weight (160gsm)

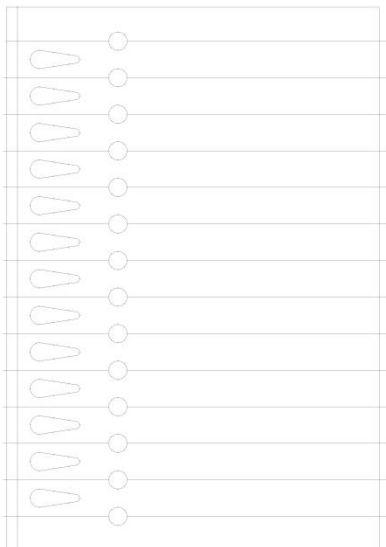

Kernow Coatings Ltd
Kernick Road
Penryn, Cornwall
TR10 9DQ
United Kingdom

www.kernowcoatings.com
sales@kernowcoatings.com
T: +44 (0)1326373147
F: +44 (0)1326376614

Registered in England
No. 1092182
A Member of the Sensitiser
Group of Companies

The information provided herein is correct to the best of our knowledge. No liability for any errors, facts or opinions is accepted. We recommend users make their own assessments to satisfy themselves as to the suitability of this product for their application. Copyright Sensitiser Group 2016