

KERNOWJET FLOORSHARK

KernowJet FloorShark is a unique floor graphics solution for indoor applications. It's perfect for retail stores, supermarkets & shopping centres, airports, travel hubs, convention centres, ideal for all smooth hard floors from concrete to tiling, also including low pile carpets tiles. Its unique sharkskin coating absorbs the inks and dries to a hard slip-resistant surface. The coating offers a high R10-certified slip resistance, Bfl-s1 and EN 13501 fire ratings and eliminates the need to laminate.



WHY CHOOSE US?

The floor graphics film is PVC-free and strongly tear-resistant, it will withstand everything from pallet trucks to stiletto heels. With its specifically developed adhesive, it is easy to apply and to reposition while applying - it will definitely not stretch or become distorted.

KernowJet FloorShark offers an excellent removability; it is ideal for smaller designs like stickers as well as covering of bigger surfaces made of multiple film strips. With zero shrinkage - avoiding the risk of a rim of dirty adhesive forming around the print once applied. FloorShark can be applied with either a butt joint or with an overlapping technique.

FEATURES

- Ultra-tough floorgraphic, suitable for smooth indoor floors
- Unique sharkskin coating absorbs the ink & dries tough, no need to laminate
- Easy to apply & easy to remove, does not tear into small pieces when removing
- No shrinkage - no risk of a rim of dirty adhesive forming around the print
- B_{fl}-s1 and EN 13501 fire ratings

UK, EU AND ROW PRODUCT LIST

PRODUCT DESCRIPTION	WIDTH	LENGTH	THICKNESS		gsm	PRODUCT CODE
			mils	microns		
170µ KernowJet FloorShark® (PET) 170TFG	1372mm	1524mm	25m	Face 6.7 Total 12.5	Face 170 Total 315	Total 385 170TFG

US PRODUCT LIST

PRODUCT DESCRIPTION	WIDTH	LENGTH	THICKNESS		gsm	PRODUCT CODE
			mils	microns		
7.1mil KernowJet FloorShark® (PET) 170TFG	54"	60'* 100'		Face 6.7 Total 12.5	Face 170 Total 315	Total 385 170TFG

*custom - denotes custom only product - please ask your representative for details




KERNOW COATINGS

KERNOWJET[™]
LATEX, SOLVENT & UV

KERNOWJET FLOORSHARK

Easy to Print, Simple to Apply

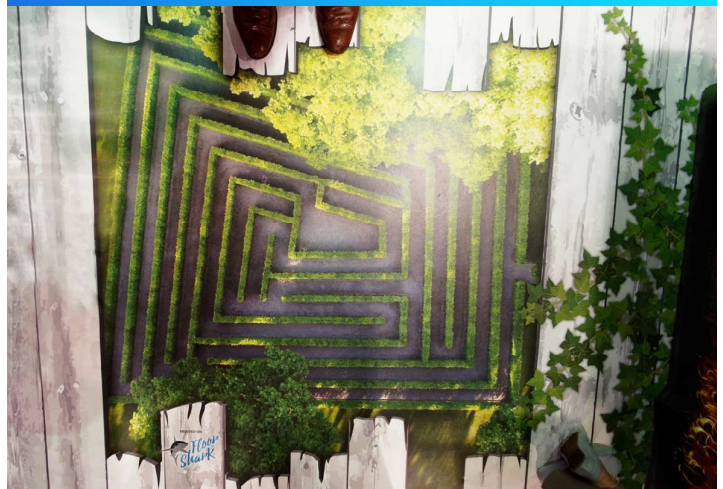

EXPAND YOUR MARKETING

"For decades skyscrapers & billboards have been used for marketing, why not utilise the floor as well. Consumers awareness for the space around them is heightened after COVID, utilising the floor is the next step."

Machine Compatibility:

Latex: ★★ ★

(Eco)Solvent: ★★ ★

UV: ★★ ★

KernowJet Floorshark

**Certified for
HP Latex Inks**



KEY FEATURES

- Unique sharkskin coating, ink absorbent & drying tough and no lamination required
- R10 slip certified, Bfl-s1 and EN 13501 fire ratings
- Durable surface, resists pallet truck scuffing & stiletto heels
- Also perfect for application to short-pile carpet tiles
- Easy to apply & easy to remove

IDEALLY SUITED FOR

- Smooth hard floors
- Low pile carpet tiles
- Indoor floorgraphic displays:
airports, convention centres,
supermarkets

	Typical Value	Units
Property	170TFG	
Total Thickness	315/12.5	µ/mil
Total Weight	385	gsm
Face Film Thickness (no adhesive)	170/6.7	µ/mil
Face Film Weight (no adhesive)	224	gsm
Liner Thickness	115	µ
Liner Weight	130	gsm
180° Peel Adhesion (SS)	11	N/25mm
Adhesive Application Temperature	5 to 50 / 41 to 122	°C/°F
Adhesive Service Temperature	-40 to 120 / -40 to 356	°C/°F

Recommended conditions:

Printroom	15°C - 30°C (59°F - 86°F)	30% - 65% RH
Storage	10°C - 20°C (50°F - 68°F)	20% - 50% RH

The information provided herein is correct to the best of our knowledge. No liability for any errors, facts or opinions is accepted. We recommend users make their own assessments to satisfy themselves as to the suitability of this product for their application. Regional certification differences apply.