

KERNOWPRINT PRO PRE-FOLDS, WRISTBANDS & DRY PEEL

KernowPrint PRO Pre-Folds have a score down the middle creating a perfectly straight fold line that is easy to use. Available in vertical and horizontal option, they have the strength and rigidity to stand up straight and professionally display your message.

KernowPrint PRO Wristbands – once peeled off, the wristbands are dry on both sides, apart from the tamper-evident adhesive patch, which secures the band together.


KernowPrint PRO Dry Peel ID Cards – each card size is ISO standard with 3mm rounded corners. They are ready to be fully personalised on demand. Once printed and peeled off, the ID Cards are completely dry.

KernowPrint PRO Dry Peel Butterfly Cards – each folded card size is ISO standard. Once printed, they are ready to be folded and the permanent adhesive will form a thick, double-sided card. This unique design allows for a duplex effect printing, while printing simplex!

simply
TOUGHER
than paper

FEATURES

- Save money and ship menus flat! Pre-scored sheets fold easily by hand and look just as crisp as anything you get out of a machine
- Wristbands separate easy and have a security adhesive grip-strip for tamper evidence
- Dry Peel cards remove cleanly from the sheet without adhesive residue or jagged perforation edges
- Ideal for facility access, event ticketing, and special occasions where you need to print on demand and on location!

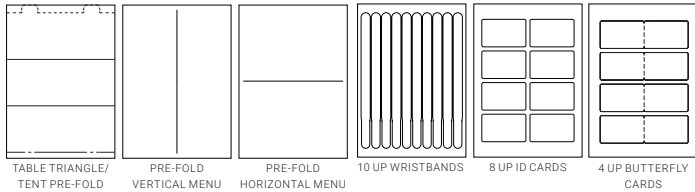

UK, EU AND ROW PRODUCT LIST

PRODUCT DESCRIPTION	SIZES	PRODUCT CODE
120µ KernowPrint PRO (PET) 10 up Dry Peel Wristbands	A4	120HNPG.10WB
195µ KernowPrint PRO (PET) Table Triangle/Tent Pre-Fold	A4	195HWT-TRI
195µ KernowPrint PRO (PET) Vertical Pre-Fold	A4	195HWT-VPF
195µ KernowPrint PRO (PET) Horizontal Pre-Fold	A4	195HWT-HPF
195µ KernowPrint PRO (PET) 8 up Dry Peel ID Cards	A4	195HWT.8DPC
195µ KernowPrint PRO (PET) 4 up Dry Peel Butterfly ID Cards	A4	195HWT.4BFC

Custom die-lines can be created and must be pre-approved (a die charge will apply)

US PRODUCT LIST

PRODUCT DESCRIPTION	SIZES	PRODUCT CODE*
5 mil KernowPrint PRO (PET) 10 up Dry Peel Wristbands	8.5x11"	P12N
8 mil KernowPrint PRO (PET) Table Triangle/Tent Pre-Fold	8.5x11"	P15ET
8 mil KernowPrint PRO (PET) Vertical Pre-Fold	8.5x11"	P15D
8 mil KernowPrint PRO (PET) Horizontal Pre-Fold	8.5x11"	P15E
8 mil KernowPrint PRO (PET) 8 up Dry Peel ID Cards	8.5x11"	P15F
8 mil KernowPrint PRO (PET) 4 up Dry Peel Butterfly ID Cards	8.5x11"	P15G

*for the size/pack-specific codes, please refer to our Narrow Format Product Guide



KERNOWPRINT®
DRY TONER

KERNOWPRINT PRO (PET) PRE-FOLDS, WRISTBANDS & DRY PEEL

The Ultimate Time and Money Savers



POWERED BY
BIOMASTER
ANTIMICROBIAL
TECHNOLOGY



PRINTERS KNOW

"Choosing a pre-fold synthetic stock for our client's menus saved us time and money – a quick response to a demanding industry."

Overall Toughness: ★★★★★

Outdoor Use: ★★★★★

Heat Resistance: ★★★★★

Chemical Resistance: ★★★★★

Rigidity: ★★★★★ (Rigid)

Adhesive: N/A

Service Range: -40°C to +255°C (-40°F to +491°F)

Special Features:

- Antimicrobial
- Alcohol-resistant
- Cleaning chemical-resistant
- Scratch-resistant
- Non-metal-marking

KERNOWPRINT PRO (PET) PRE-FOLDS, WRISTBANDS & DRY PEEL



COMPATIBILITY:

Laser/Dry Toner: ★★★★★

HP Indigo: ★

Inkjet: N/A

TESTED FOR:

OKI  **intec** **Canon**

xerox **KONICA MINOLTA** **RICOH** **Kodak**

KEY FEATURES

- Pre-scored / pre-perforated and ready to personalise
- Waterproof, tearproof, greaseproof, can be hole punched
- Ideal for documents where strength and light weight are required
- No need to laminate

IDEALLY SUITED FOR

- Restaurant menus
- Retail tags
- Bar menus
- Information tags
- Creative signage
- Table markers
- Message display
- Event handout
- Eye-catching marketing pieces

Typical Value

Units

Property	120HNP.10WB / P12N	195HWT-TRI / -VPF / -HPF / .8DPC / .4BFC / P15ET / P15D / P15E / P15F / P15G	Units
Total Thickness	120/4.7	195/7.7	µ/mil
Weight	160	260	gsm
Opacity	> 96	> 98	%
CIE Whiteness	> 140	> 140	CIE WI
Gloss 60°	< 4	< 4	%
Shrinkage	MD -0.37 TD +0.1	MD < 1.3 TD < 0.4	%
Tensile Strength	MD 16 TD 18	MD 16 TD 18	kgF/mm2
Elongation at break	MD 140 TD 115	MD 140 TD 115	%
Melting Point	250/482	250/482	°C/°F

Recommended conditions:

Printroom	10°C - 30°C (50°F - 86°F)	40% - 55% RH
Storage	10°C - 20°C (50°F - 68°F)	20% - 55% RH

Please return unused product to its original packaging.

Shelf Life: 24 months after delivery (under recommended storage conditions).

The information provided herein is correct to the best of our knowledge. No liability for any errors, facts or opinions is accepted.

We recommend users make their own assessments to satisfy themselves as to the suitability of this product for their application.

Regional certification differences apply.